



TELESCOPIC BELT CONVEYOR

ATB606-ATB709-ATB812

ATB606-ATB709-ATB812

ALTINBILEK Telescopic Belt Conveyor, enables the rapid loading and unloading of packaged and unpackaged products such as parcels, packages, sacks, etc. for vehicles such as Containers, Trucks, and Trailers. It can extend to the point where it will carry the product inside the vehicle thanks to its adjustable working height. The vehicle does not need to move during the operation. It is widely used in warehouses, food industry, biscuit, flour, and feed factories. In addition to faster and more efficient loading and unloading, the hand control provides ergonomic operation for operators and is easy to use.

FEATURES

- Adjustable Height
- Robust Structure
- Fast Operation
- Ease of use
- Minimum Personnel
- Bidirectional Operation

DRIVE SYSTEM

- Rubber Coated Driving Drum
- Power Transmission with Chain Connection
- Reducer Motor
- Propelling with Rack System

SECURITY SYSTEM

- Emergency Stop
- Housing for Rotating parts
- On / Off Sensors
- Roller Pulse Detection Sensor (Optional)

ACCESSORIES

- Maintenance Windows
- Housings
- Remote Controller (Optional)

TECHNICAL SPECIFICATIONS

Machine	ATB606	ATB709	ATB812
Maximum Length	12m	16m	21m
Belt Width	580 mm		
Maximum Bearing Capacity	50kg/m		
Drive System	Electric-Hydraulic		
Sound Level	50-65 dB		
Operating Conditions	-15°C ÷ 40°C ambient temperature		


MATERIALS

Body	Standard	Painted (Carbon Steel)
Belt	Standard	PVC
Cylindrical	Standard	ISO 3320
Rope	Standard	Steel Rope Nufleks



TELESCOPIC BELT CONVEYOR

ATB606-ATB709-ATB812 ATB606-ATB709-ATB812

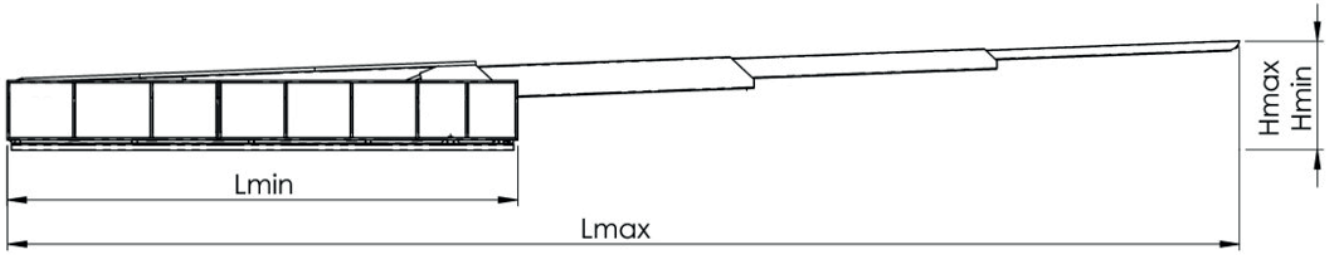

MODEL	L_{max} (mm)	L_{min} (mm)	H_{max} (mm)	H_{min} (mm)
ATB606	12000	6000	3000	1250
ATB709	16000	7000	3150	1250
ATB812	21000	8500	3150	1100

Designs and dimensions are subject to change without notice.